




# Blu L120 Rear Facing Camera Replacement

Use this guide to remove the camera.

Written By: Julio

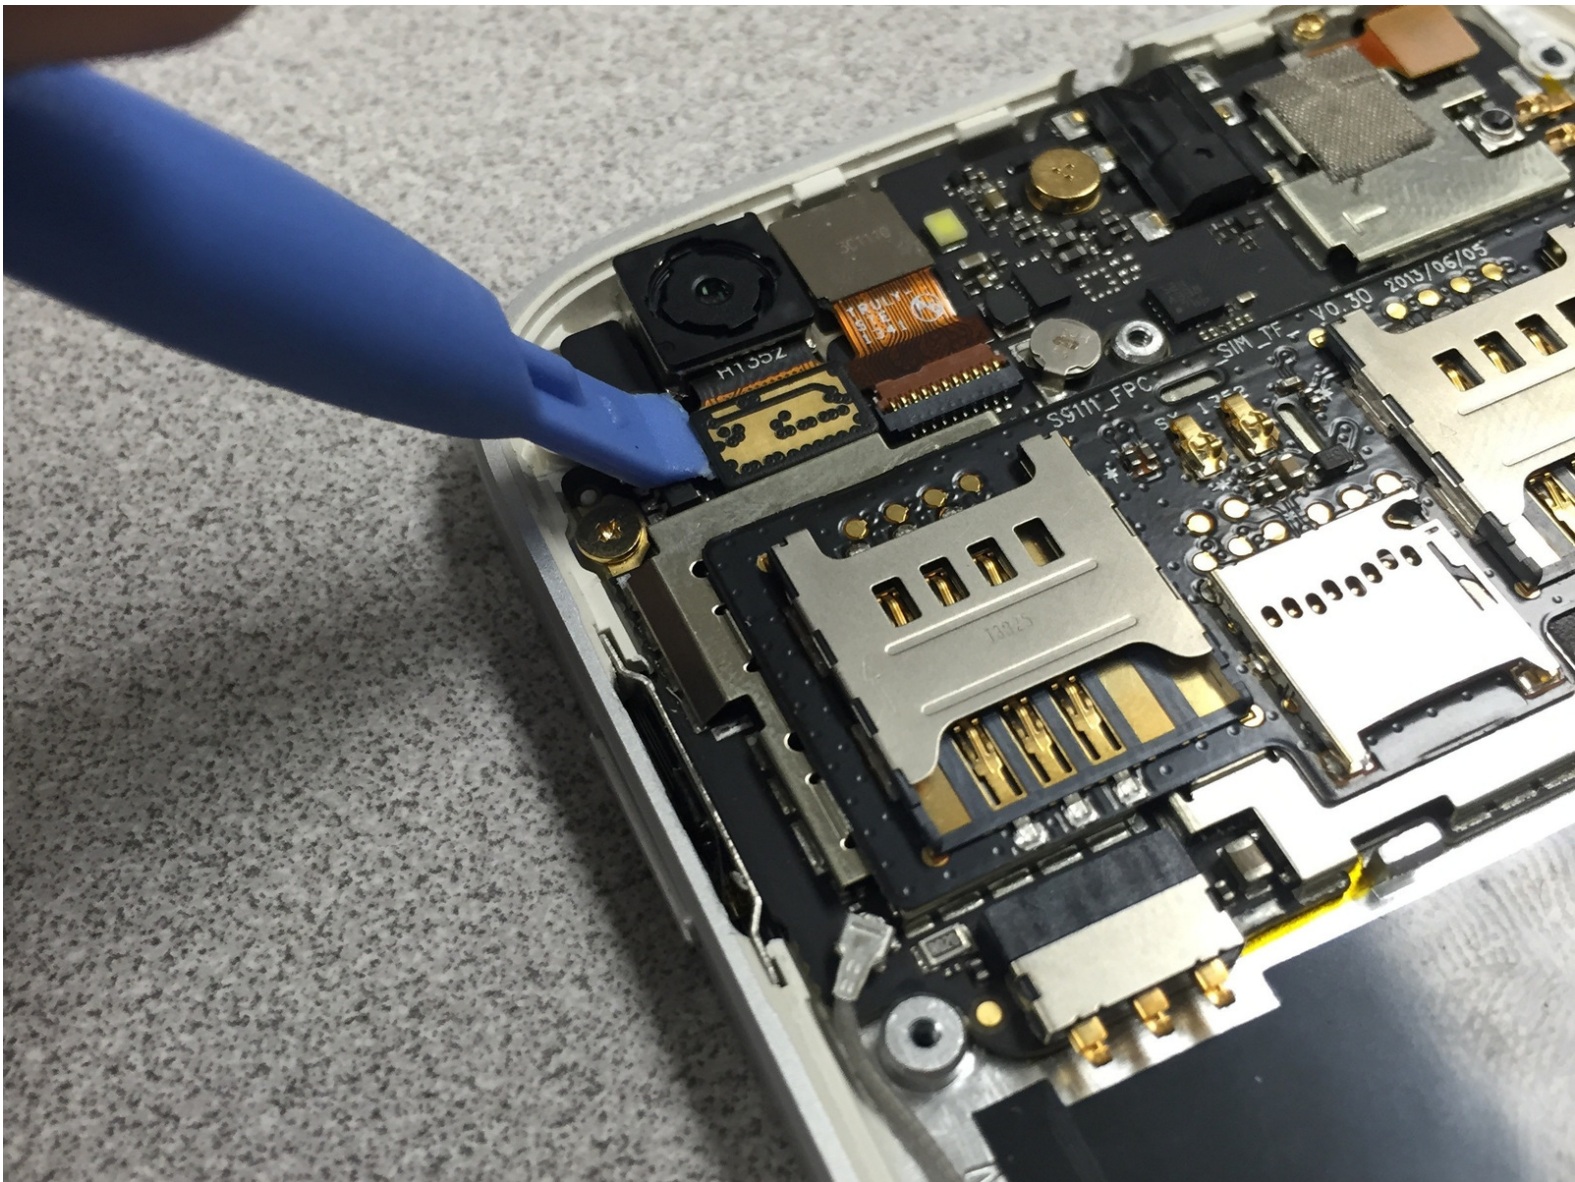




## TOOLS:

- [Phillips #00 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
  - [Spudger](#) (1)
-




## Step 1 — Remove back panel

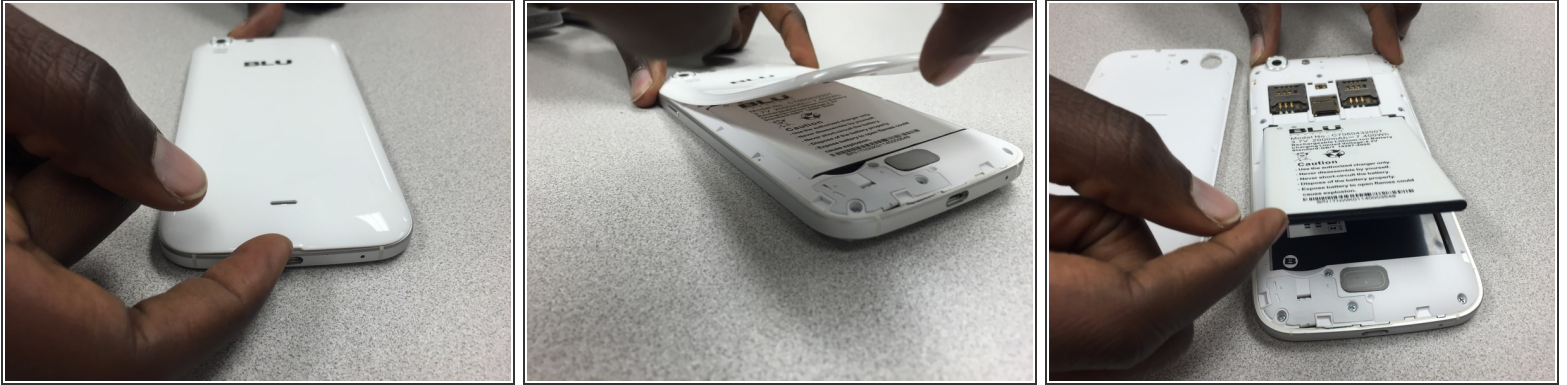


- Remove the cover by lifting the notch towards the bottom of the phone. Use your fingernail to lift it up.

## Step 2 — Screw Removal

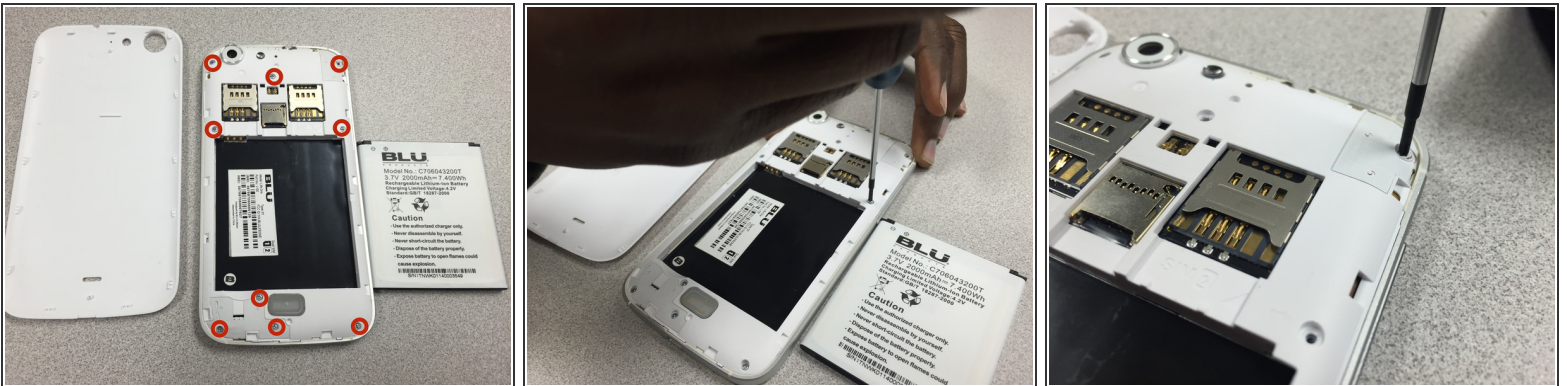


- Remove these nine screws with a small Phillips screwdriver. They are all the same size.
- There is a small screw hidden under the warranty sticker. You may either remove or poke through it .

### Step 3 — Rear Panel removal

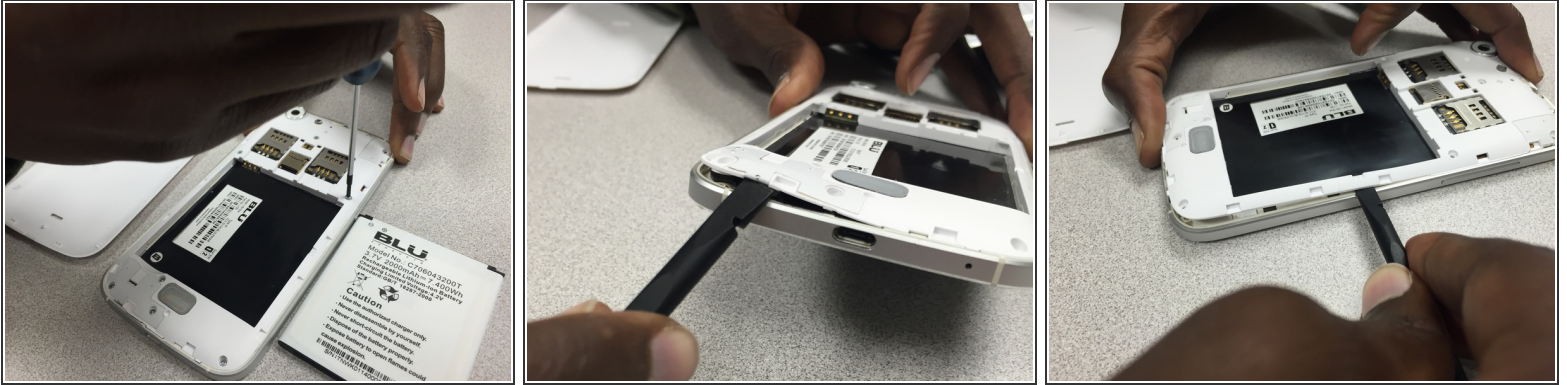

- Use the pry tool to gently separate the panel from the frame, starting from the bottom left corner and continue along the edge of the phone.
- **\*WARNING\*** by doing this, you will void the manufacturers warranty.




### Step 4 — Separate back panel from frame

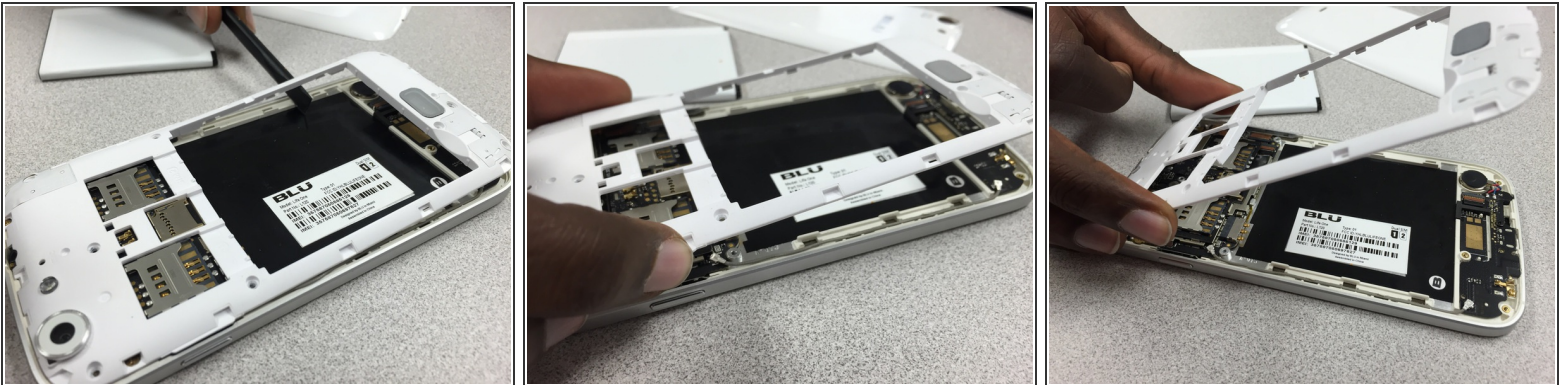

- Continue using the pry tool around the back panel of the phone to separate both pieces.
- Once you have gone around the entire frame, use both hands to pull it apart.



## Step 5 — Camera Removal

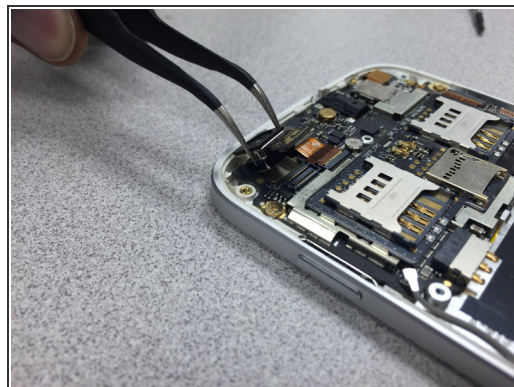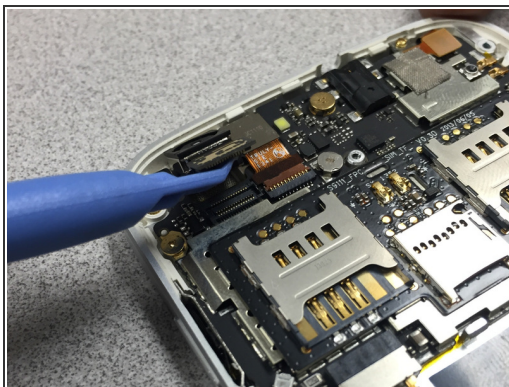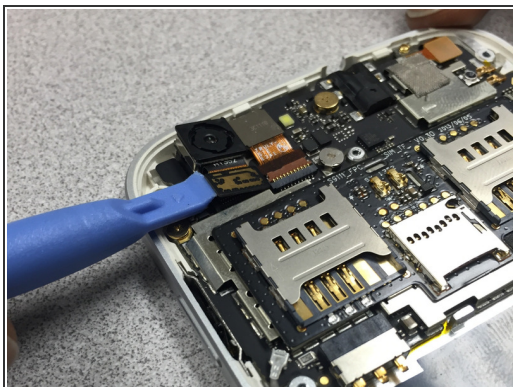

- Use the pry tool to disconnect the camera from the device.
- Gently lift the camera up and use the tweezers to remove it from the phone.
- Reinstall the camera. Then follow the guide in reverse to put the phone back together.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-19 10:25:17 AM.